



ROUND NON-TAPERED ALUMINUM OR STEEL POLES FOR USE WITH RLM POLE TOP BRACKETS

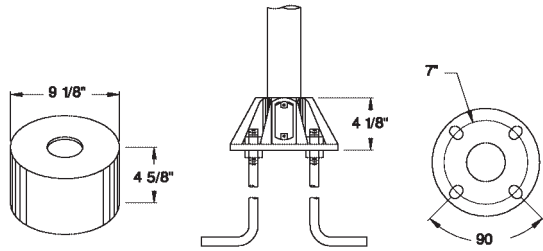


ARN SERIES POLES

Round Aluminum Poles accept all reflector pole top brackets. Available 8', 10', 12', and 14', high in either .125" or .188" wall shaft. Pole top 3" O.D.

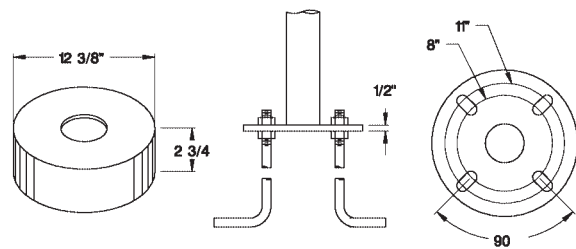

SRN SERIES POLES

Round Steel Poles accept all reflector pole top brackets. Available 8', 10', 12', 14', and 16', high. All shafts are 7 gage steel. Pole top 2-7/8" O.D.

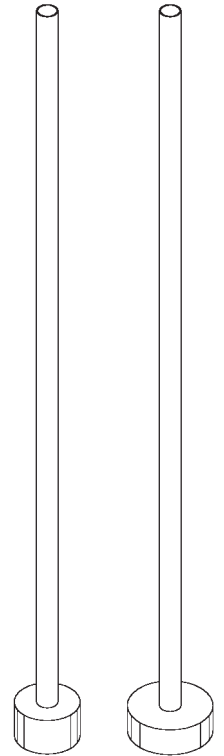

2" X 4" Hand hole, anchor bolts, spun aluminum base cover and template provided.

ARN

SRN

Pole Series	Height	Dia.	Wall Size	Bolt Projection	Bolt Circle	Bolt Size	POLE LOAD RATING (Fixture E.P.A.) with 1.3 Gust factor				Options
							70MPH	80MPH	90MPH	100MPH	
ARN Round Aluminum	8'-0"	3"	.125"	1-1/4"-1-3/4"	7"	3/4" X 15"	7.1	5.2	3.9	3.0	DBP Dark bronze BLP Black WHP White TP Tamper proof hand hole screws DPLX Weathertight duplex receptacle GFI Ground fault interrupting duplex receptacle GVBT Galvanized anchor bolts
			.188"				25.7	19.4	15.1	12.1	
	10'-0"		.125"				5.0	3.5	2.5	1.8	
			.188"				20.1	14.9	11.3	8.8	
	12'-0"		.125"				3.5	2.3	1.5	0.9	
			.188"				16.4	12.1	9.1	7.0	
	14'-0"		.125"				2.5	1.5	0.8	—	
			.188"				7.7	5.8	4.5	3.6	
SRN Round Steel	8'-0"	3"	7 Gage	1-1/4"-2-1/2"	8"-11"	3/4" X 15"	24.5	18.5	14.4	11.5	
	10'-0"		7 Gage				18.7	14.0	10.8	8.5	
	12'-0"		7 Gage				14.6	10.8	8.2	6.4	
	14'-0"		7 Gage				12.0	8.7	6.5	4.9	
	16'-0"		7 Gage				9.4	6.7	4.8	3.5	
			7 Gage								

EXAMPLE OF A TYPICAL ORDER

ARN • 8 • 3 • 188 • BLP